


Setup of Iiyama LH series for iiSignage2

As a starting point, the screen is set to Danish language and the correct time. Turn on the screen and follow the wizard to set it up with language and time etc.

- Overview of remote control2
- Setting up WIFI3
- Setting up iiSignage5
- Youtube video with extra guide from iiyama8




Overview of remote control

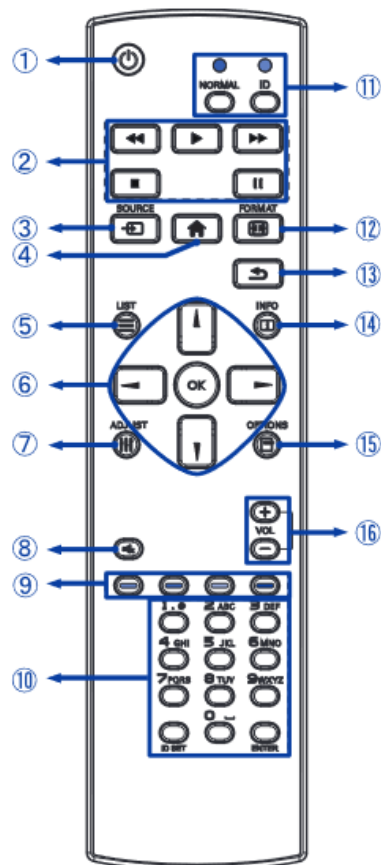


①		Turns the monitor ON and OFF.
②	[PLAY]	Control playback of media files. ▶ : Play ■ : Stop ⏸ : Pause ◀◀ : Quick-Return ▶▶ : Fast-Forward
③	SOURCE	Selects the source. Press ▲ or ▼ button to select from HDMI1, HDMI2, HDMI3, VGA, DVI-I, DisplayPort, SDM*, Browser, CMS, File Manager, Media Player, PDF Player or Custom. Press [OK] button to confirm and exit.
④	HOME	Opens the display's on-screen menu systems.
⑤	LIST	Return to the previous menu. Only Browser, Media Player and PDF Player inputs.
⑥		Navigates through submenus and settings. ▲ : Up Button ▼ : Down Button ◀ : Left Button ▶ : Right Button In Media Player: ◀ : Previous file ▶ : Next file In PDF Player: ◀ : Previous page ▶ : Next page
	OK	Confirms your selection or save changes.
⑦	ADJUST	Auto Adjust function only available when VGA input is selected.
⑧	MUTE	Turns on or off the mute function when the Menu is not displayed.
⑨	COLOR	Not available on this model.
⑩	NUMBER/ ID SET/ ENTER	Enter text for network setting or ID setting.
⑪	ID Mode	ID: To enter ID Mode NORMAL: To leave ID Mode
⑫	FORMAT	Change picture format.
⑬	BACK	Returns to a previous menu or closes the OSD Menu.
⑭	INFO	Provides source and resolution information. Press the button for 6 seconds to unlock the remote control.
⑮	OPTIONS	Display edit bar. Only Browser, Media Player and PDF Player inputs.
⑯	VOLUME - / +	VOLUME- : Decreases the sound volume. VOLUME+ : Increases the sound volume.

Setting up WIFI


If the screen is to be run via WIFI, set it up by selecting SOURCE, then CMS also System settings

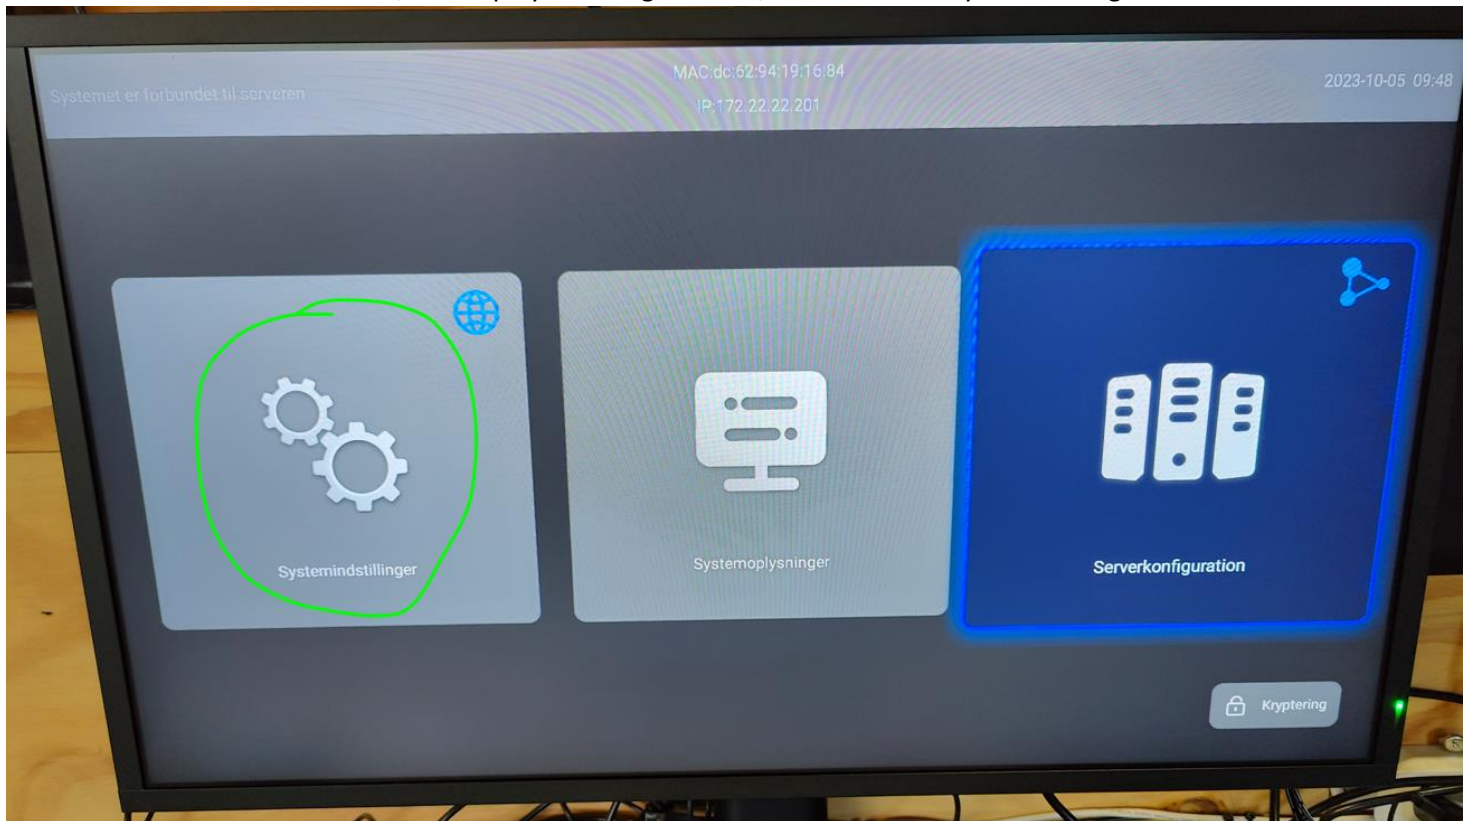

Then select Network and Internet

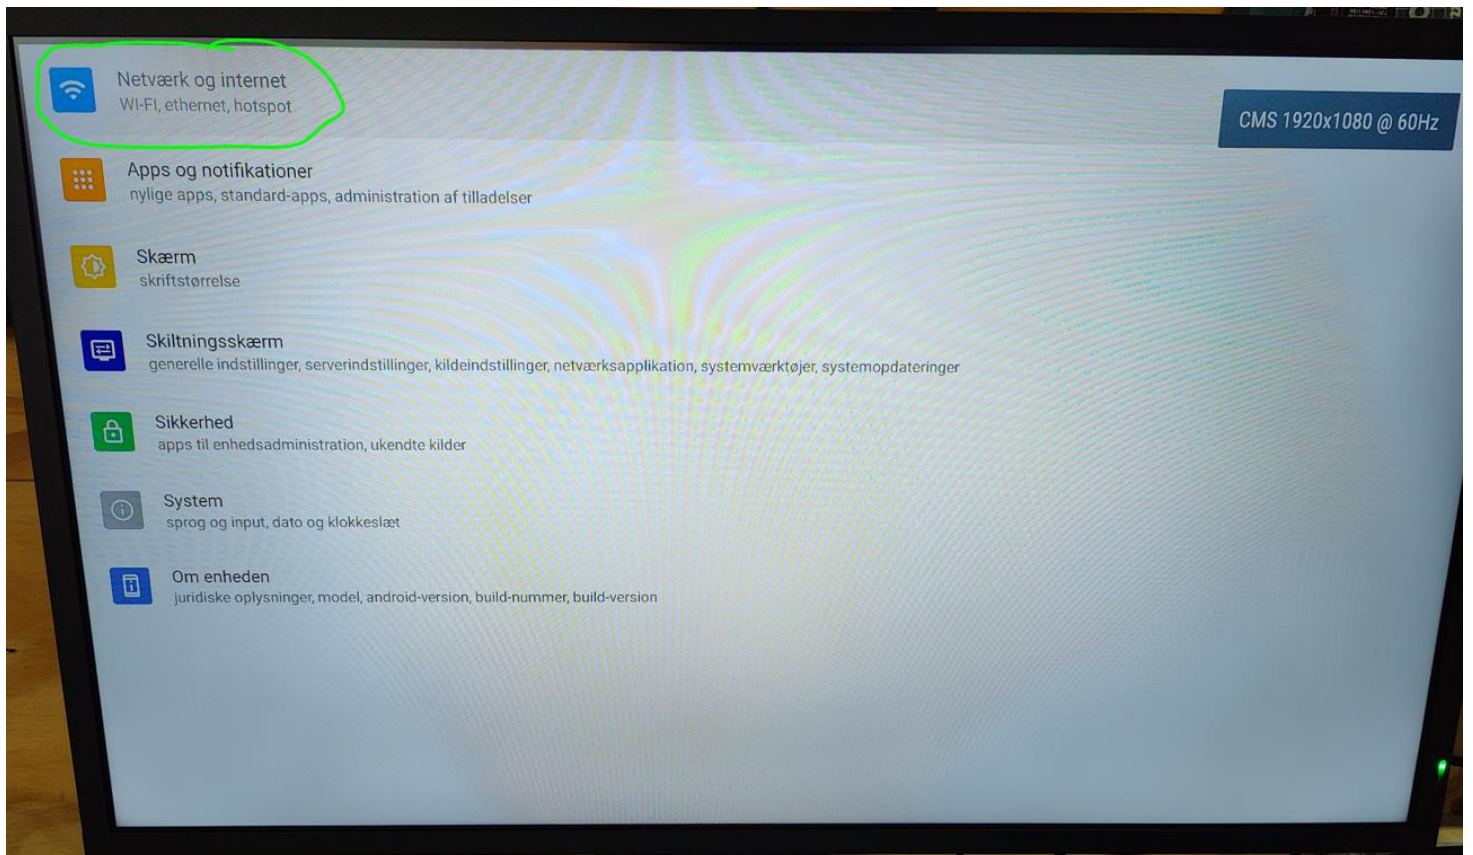


Connect to WIFI as you know it from phone / tablet

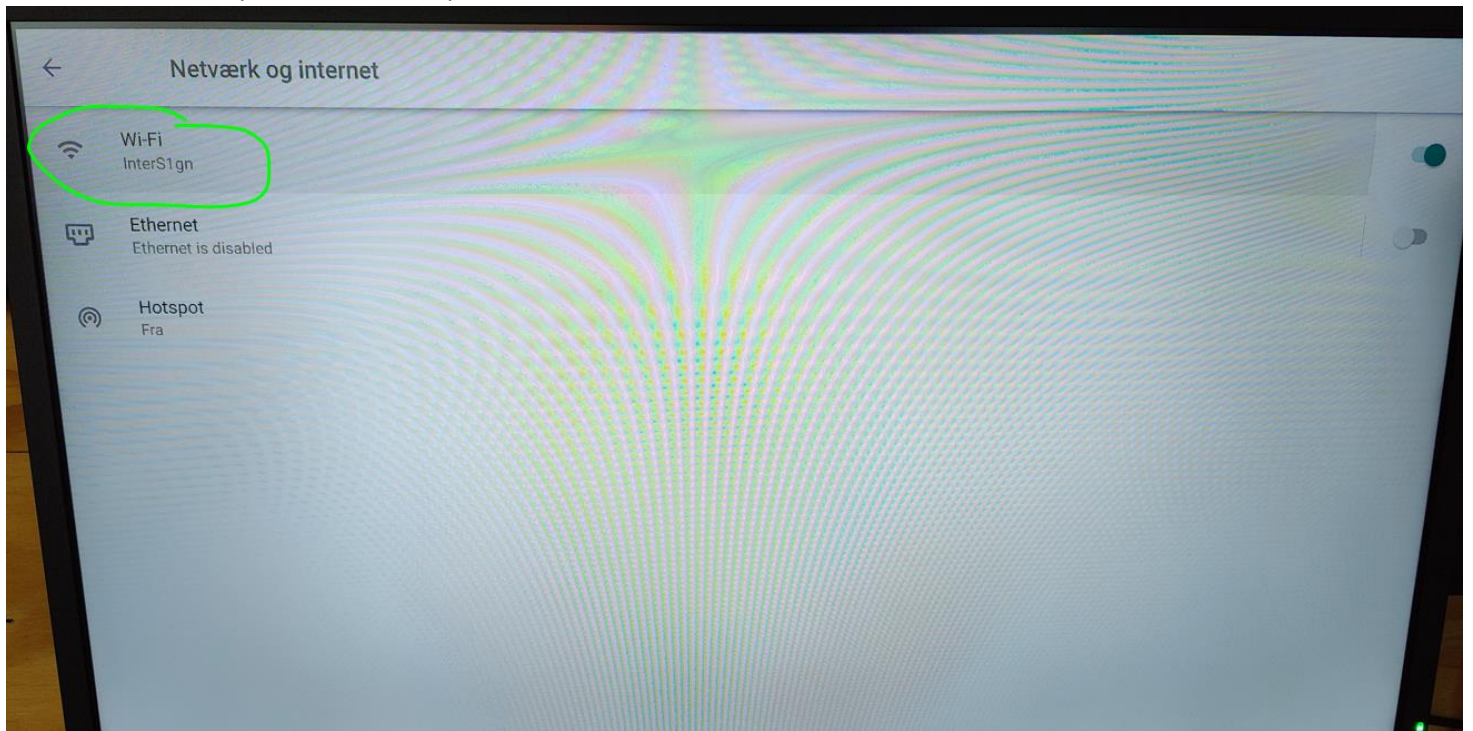


Setting up iiSignage


Press Source and select CMS and then Server Configuration

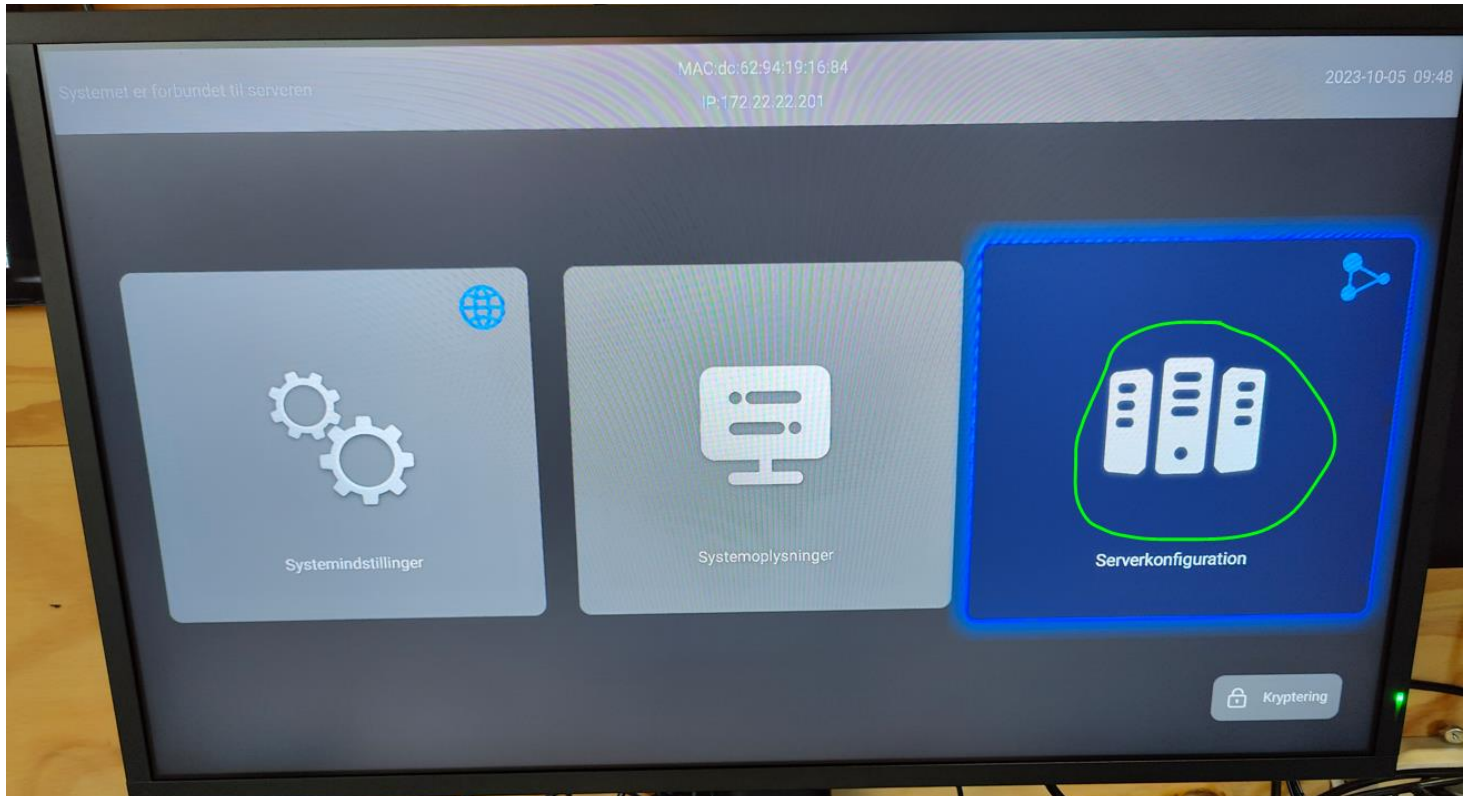

Then the screen must be named and the ID from <https://www.iiyama-cms.com> must be entered. Finish with Confirm

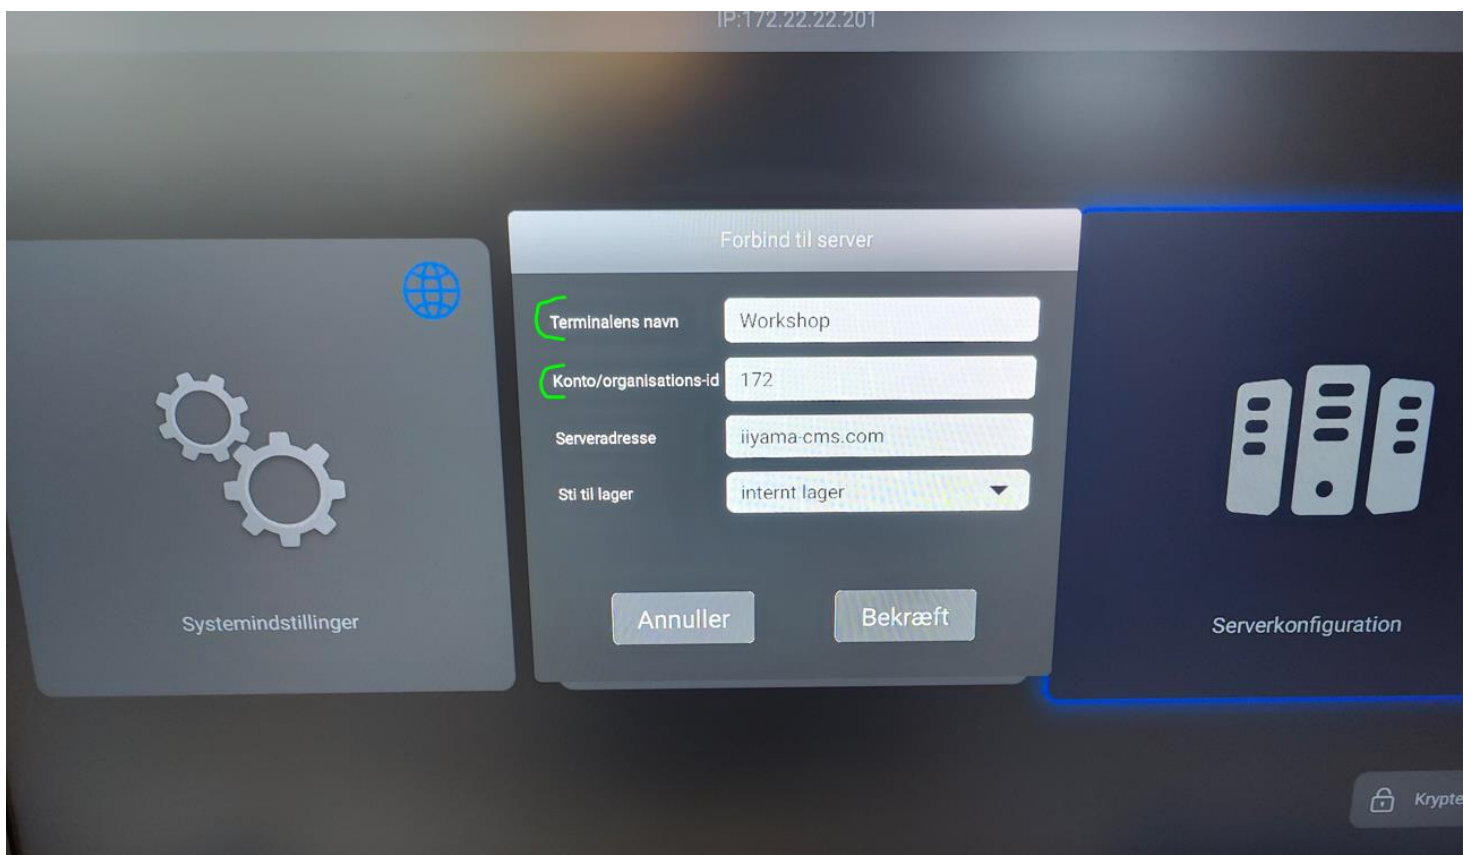


Press the HOME button and select Configuration 1

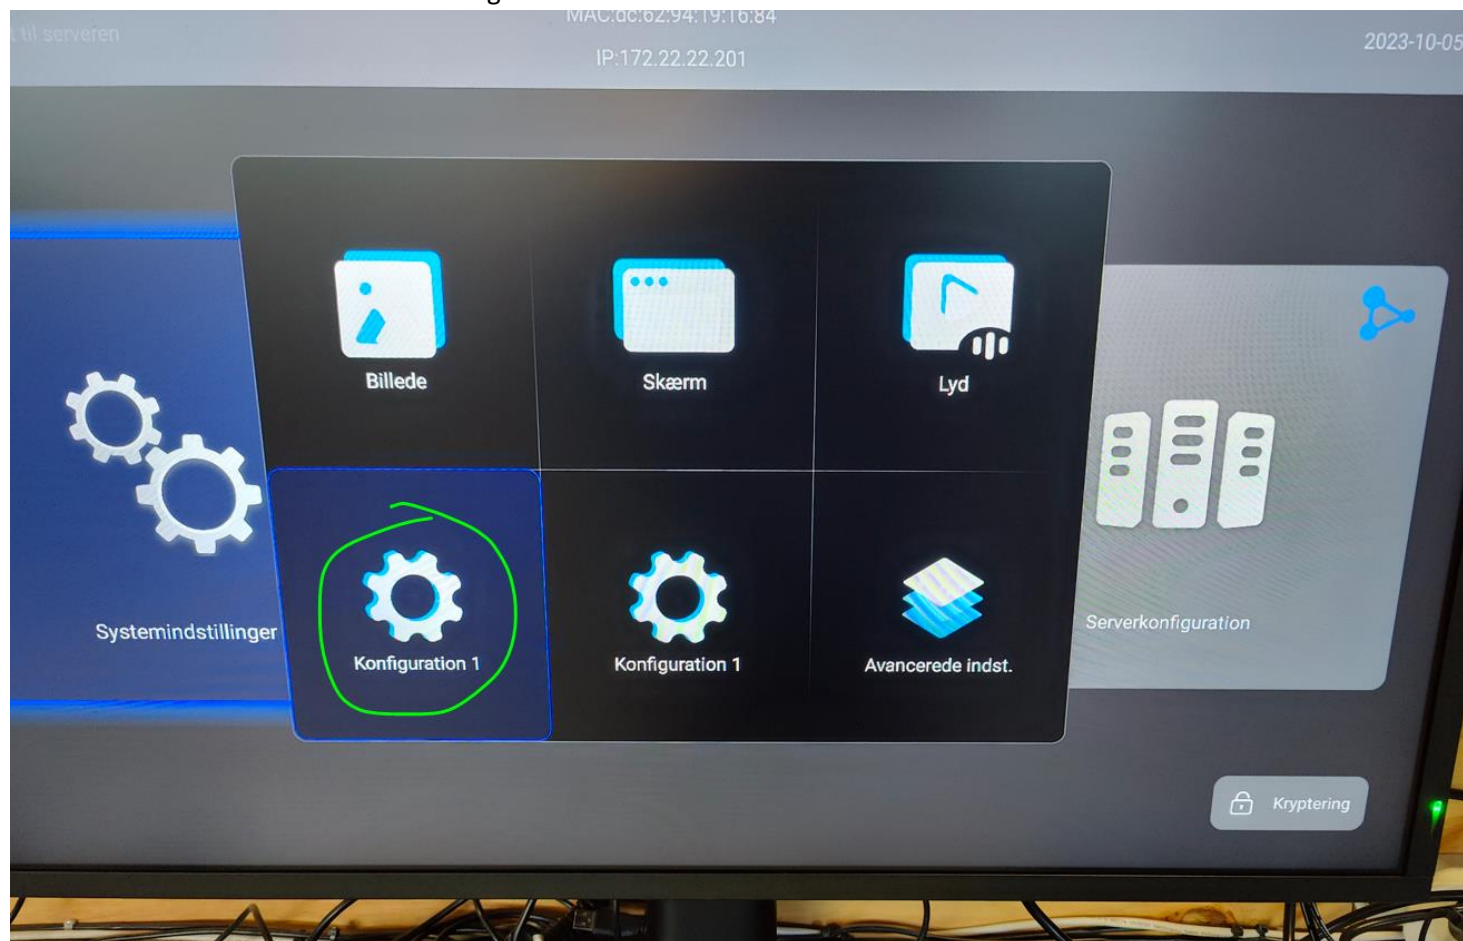

Select Start at source



Set Last Ind. to From and Merge are set to CMS

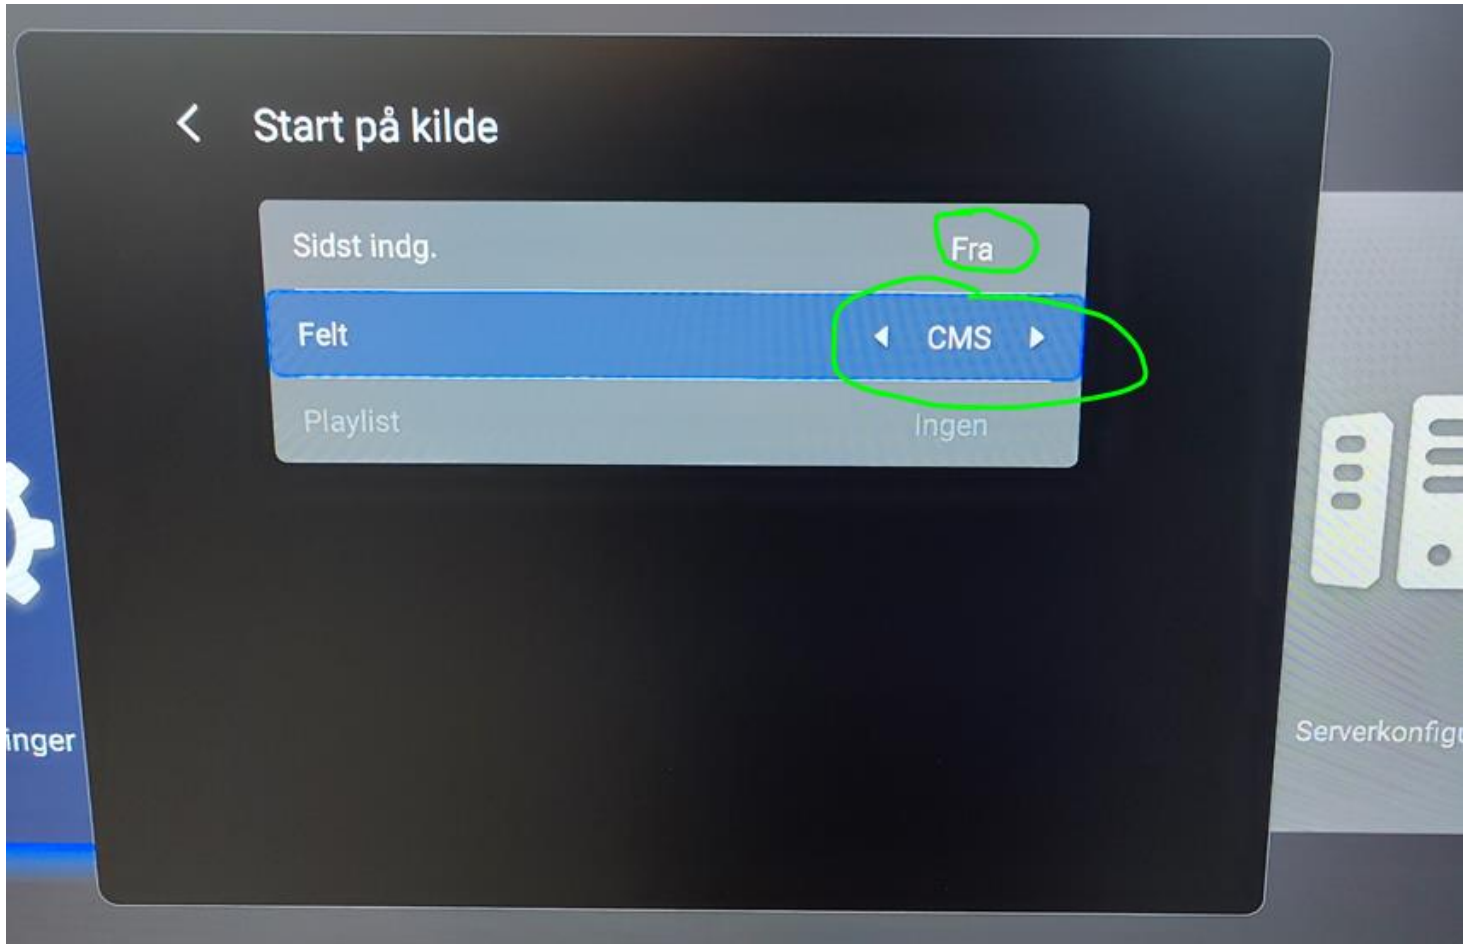

Finish by turning off the screen and turning it on again and the CMS will start automatically

The screen can now be controlled from <https://www.iiyama-cms.com> and it can receive content

Youtube video with extra guide from iiyama

